



South Fence Machinery LTD

ADVANCED WIRE FENCE TECHNOLOGY

2.00mm Tooling Kit for Stiff Stay Machine

For manufacturers wanting to produce a lighter version of the highly successful 2.50mm Stiff Stay fence.

Wire Specifications

*Line Wire - 2.00mm with tensile from 525 - 1390 N/mm² or 34 - 90 Tons/sq in
Stay Wire - 2.00mm with tensile from 525 - 850 N/mm² or 34 - 55 Tons/sq in
Knot Wire - 2.00mm with tensile from 400 - 525 N/mm² or 26 - 34 Tons/sq in*

Fence Specifications

All fence specifications that can be run in 2.50mm can also be run in 2.00mm with the 2.00mm kit. Plus there is no restriction on the number of 50mm line wire spacings that are allowed.

Applications

- For the fencing of small animals or where a lighter and more cost effective fence is required.
- For the protection of young trees or other plants.


Compatibility

The 2.00mm Tooling Kit can be used on all South Fence Machinery Ltd's Stiff Stay machines.

Installation / Change Over Procedures

All parts supplied with the kit must be fitted.

Once fitted changeovers to different 2.00mm fence specifications are exactly the same as for the standard 2.50mm fence.

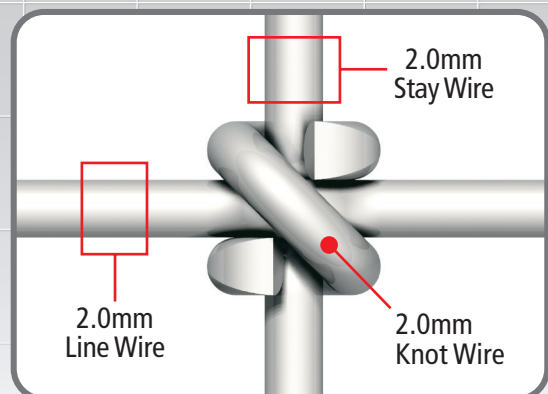

For further information please contact:

South Fence Machinery Limited

256 Main South Road, P.O. Box 16154, Christchurch, New Zealand

Telephone (64 3) 349-5492

Fax (64 3) 349-5022

Email info@southfence.co.nz

Website www.southfence.com

UPDATE